



CCTV MONITOR

B/W & COLOR MONITORS

CM-1001A / CM-1002A / CM-1020A / CM-1004AH / CM-1017AH / CM-1021AH



SPECIFICATION


| Model Number | CM-1001A | CM-1002A | CM-1020A | CM-1004AH | CM-1017AH | CM-1021AH |
|--------------------|---|----------------------|----------------------|---|----------------------|--------------------|
| CRT | 12" 90° B/W P4 glare | 15" 90° B/W P4 glare | 20" 90° B/W P4 glare | 14" 90° Color P22 | 17" 0.25mm color CDT | 21" 90° Color P22 |
| Scanning Frequency | EIA: 15.750KHz/60Hz, CCIR: 15.625KHz/50Hz | | | NTSC: 15.750KHz/60Hz, PAL: 15.625KHz/50Hz | | |
| Resolution | 800 TV line | 1000 TV line | | 400 TV line | 800 TV line | 500 TV line |
| Bandwidth | 10MHz (-3dB) | 12MHz (-3dB) | | | | |
| Video Input | Composite Video 1 Vp-p | | | | | |
| Input Power | 100V~240V AC 50/60 (Auto) | | | | | |
| Power Consumption | 30 W (Max.) | 35 W (Max.) | 36 W (Max.) | 60 W (Max.) | 100 W (Max.) | 90 W (Max.) |
| Video Connectors | BNC In/Out x 1 set | | | BNC In/Out x 1 set | BNC In/Out x 2 set | BNC In/Out x 2 set |
| Audio Connectors | RCA In/Out x 1 set | | | S-VHS Y/C In/Out x 1 set | | |
| Dimension (mm) | 304x320x310(WxHxD) | 350x353x360(WxHxD) | 472x450x360(WxHxD) | 350x353x360(WxHxD) | 416x400x417(WxHxD) | 492x464x482(WxHxD) |

*Specifications subject to change without notice

CM-L17



BNC-type video input & output

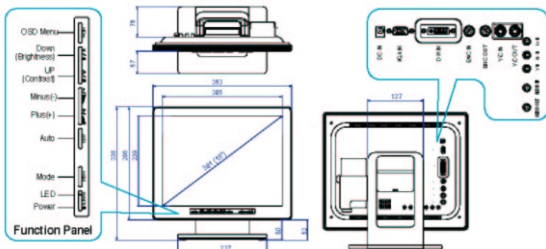

LCD MONITORS

CM-L15 / CM-L17

SPECIFICATION

| Model Number | CM-L15 | CM-L17 |
|------------------------|---|-----------------------|
| Viewing Area | 15" TFT | 17" TFT |
| Resolution | 1024x768 XGA | 1280x1024 SXGA |
| Effective Display Area | 304.1 x 228.1mm | 337.92 x 270.34mm |
| Color | 262,114 | 16.7M |
| Response Time (tr/ta) | 16 ms | 15/10 ms |
| Contrast Ratio | 400:1 | 500:1 |
| Brightness | 500 cd/m ² | 250 cd/m ² |
| View Angle | 140° (H) / 130° (V) | 170° (H) / 170° (V) |
| Signal Connector | Video 1.0 Vp-p 75 / BNC In/Out Y/C In/Out, Audio In/Out, VGA 15 pin D-Sub | |
| Scan Frequency | H: 30~80KHz / V: 56~75Hz | |
| Display Mode | Video & S-Video & VGA | |
| OSD Menu | Color, Tint, Brightness, Contrast, Sharpness, Volume, Language, Scan, Color Temp, H-Position, PIP, Recall | |
| Power Consumption | 50 W (Max.) | |
| Power Input | DC Input: 12V / 3A | |
| Dimension | 353x338x170(WxHxD) | 375x370x170(WxHxD) |
| Weight | 4 Kgs(Net) / 5.4 Kgs | 5 Kgs(Net) / 7.2 Kgs |
| Safety & EMI | FCC, CE, UL, CUL, BSMI | |
| Audio Speaker | 1W (Max.) | |
| Operating Temperature | 0° C ~ 40° C | |

*Specifications subject to change without notice