

# EyeCom Bullet IR Cameras



## CC-4510HL



- ✓ 1/3" SONY H.Q.1 CCD: 550 TV LINES
- ✓ MECHANICAL IR CUT FILTER (ICR)
- ✓ EXTERNAL ZOOM/FOCUS ADJUSTMENT
- ✓ 2.8~12MM AUTO IRIS
- ✓ 2ND VIDEO OUTPUT
- ✓ DIGITAL NOISE REDUCTION (DNR)
- ✓ ELECTRONIC IRIS
- ✓ BUILT-IN O.S.D. MENU
- ✓ DC/AC DUAL VOLTAGE
- ✓ HIDDEN CABLE BRACKET
- ✓ 48 IR LEDs, NIGHT VISION: 120 FT.




Zoom/Focus Adjustment



### Specifications

CC-4510HL	
Total Pixels	NTSC: 811(H)x508(V) / PAL: 795(H)x596(V)
Effective Pixels	NTSC: 768(H)x494(V) / PAL: 752(H)x582(V)
Image Pick-up Device	1/3" Sony H.Q.1 CCD
Scanning System	Interlace
Frequency	NTSC: 15.734KHz (H), 59.94Hz (V) PAL: 15.625KHz (H), 50.00Hz (V)
Horizontal Resolution	More than 550 TV Lines
Video Output	1Vp-p, 75Ω
S/N (Y signal)	50dB (AGC OFF)
Minimum Illumination	0 Lux IR On, 0.3 Lux/F1.2(Color), 0.1Lux/F1.2(B/W)
Color	Auto Day/Night
Gain Control	Off/Low/Middle/High
White Balance	ATW/AWC/Manual/Fixed (OSD selected)
Shutter Speed	Auto/Fixed/Manual/FLK(OSD selected)
Backlight Compensation	On/Off(OSD selected)
Iris Control	Auto, DC IRIS
AGC Control	Low/High(OSD selected)
Mirror	Built-in(Horizontal Image Inversion)
Lens Mount	2.8~11mm DC Auto Iris Lens
IR LEDs	48 LEDs: Up to 120 ft.
Supplied Voltage	9.5V~15V(Recommend 12V ±0.5V)
Power Supply	DC 12V / AC 24V 200mA (CDS On:630mA Max)
Operating Temperature	14°F~122°F (-10°C~50°C)
Operating Humidity	10~85% RH
Dimensions	3.07(W) x 3.07(H) x 7.17(D) inches
Weight	4.4 lbs.

\* Specifications Subjected to Change Without Prior Notice

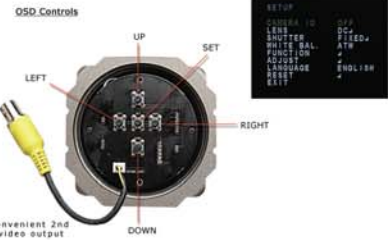

## CC-4550HL



- ✓ 1/3" SONY H.Q.1 CCD: 550 TV LINES
- ✓ MECHANICAL IR CUT FILTER (ICR)
- ✓ EXTERNAL ZOOM/FOCUS ADJUSTMENT
- ✓ 5~50MM AUTO IRIS
- ✓ 2ND VIDEO OUTPUT
- ✓ DIGITAL NOISE REDUCTION (DNR)
- ✓ ELECTRONIC IRIS
- ✓ BUILT-IN O.S.D. MENU
- ✓ DC/AC DUAL VOLTAGE
- ✓ HIDDEN CABLE BRACKET
- ✓ 12 LONG RANGE IR LEDs, NIGHT VISION: 240 FT.



Zoom/Focus Adjustment



### Specifications

CC-4550HL	
Total Pixels	NTSC: 811(H)x508(V) / PAL: 795(H)x596(V)
Effective Pixels	NTSC: 768(H)x494(V) / PAL: 752(H)x582(V)
Image Pick-up Device	1/3" Sony H.Q.1 CCD
Scanning System	Interlace
Frequency	NTSC: 15.734KHz (H), 59.94Hz (V) PAL: 15.625KHz (H), 50.00Hz (V)
Horizontal Resolution	More than 550 TV Lines
Video Output	1Vp-p, 75Ω
S/N (Y signal)	50dB (AGC OFF)
Minimum Illumination	0 Lux IR On, 0.3 Lux/F1.2(Color), 0.1Lux/F1.2(B/W)
Color	Auto Day/Night
Gain Control	Off/Low/Middle/High
White Balance	ATW/AWC/Manual/Fixed (OSD selected)
Shutter Speed	Auto/Fixed/Manual/FLK(OSD selected)
Backlight Compensation	On/Off(OSD selected)
Iris Control	Auto, DC IRIS
AGC Control	Low/High(OSD selected)
Mirror	Built-in(Horizontal Image Inversion)
Lens Mount	5~50mm DC Auto Iris Lens
IR LEDs	12 LEDs: Up to 240 ft.
Supplied Voltage	9.5V~15V(Recommend 12V ±0.5V)
Power Supply	DC 12V / AC 24V 200mA (CDS On:680mA Max)
Operating Temperature	14°F~122°F (-10°C~50°C)
Operating Humidity	10~85% RH
Dimensions	3.07(W) x 3.07(H) x 7.17(D) inches
Weight	4.4 lbs.

\* Specifications Subjected to Change Without Prior Notice

