

FEATURES

- 1 Channel Portable DVR
- MPEG4 Compression
- 1 Ch. Video & Audio Recording
- CF card plug-in and record
- Motion detection and schedule recording.
- Built-in 2.5" color LCD.
- Battery Operation

SPECIFICATIONS

Model Name	DVR-102
Video System	NTSC / PAL
Video Codec	MPEG4-SP ASF File Format
Video Recording Frame Rate	1-30 IPS (adjustable)
Video Resolution	720x240,320x240 (NTSC) 720x288,320x288 (PAL)
Video Input	1 CH
Video Output	1 CH
Audio Codec	G.726 / 32 Kbps
Audio Input	1 CH
Audio Output	1 CH
Video Quality Level	High / Medium / Low
Storage Media	Compact Flash (CF) Memory Card
Recording Mode	Manual / Schedule / Motion Detection
Recording Detection Setting	Detect Area / Sensitivity
Event Search Function	Easy Search Bar (Date, Time and Event Type auto display)
Playback Speed	x1 / x2 / x4 / x8 / x16 / x32
TFT LCD Panel	2.5"
Speaker	Built-in
Power Supply	AC100~240V 50/60 Hz, DC12V / 1A or AAx4 Batteries
Dimensions(W x H x D)	142.5x91x30 mm

* Design & Specifications subject to Change without Prior Notifications.




Recording Time Table

1. Continuous/Non-Stop Recording

Memory Size	High Quality (minutes)	Medium Quality (minutes)	Low Quality (minutes)
128 MB	20	40	60
256 MB	40	80	120
512 MB	80	160	240
1 GB	160	320	480
2 GB	320	640	960
4 GB	640	1280	1920

2. Motion Detection Recording

Memory Size	High Quality (minutes)		Medium Quality (minutes)		Low Quality (minutes)	
	30% Motion	70% Motion	30% Motion	70% Motion	30% Motion	70% Motion
128 MB	65	28	130	57	200	85
256 MB	130	57	165	115	400	170
512 MB	165	115	530	225	800	340
1 GB	530	225	1060	455	1600	685
2 GB	1060	455	2130	915	3200	1370
4 GB	2130	915	4265	1825	6400	2740

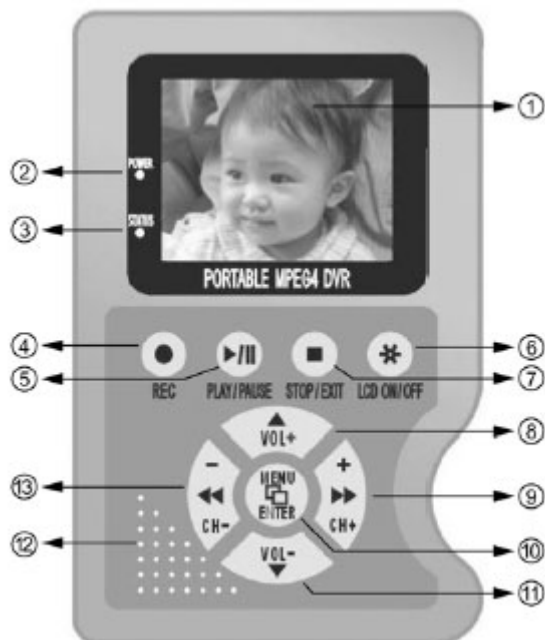

- (1) 2.5" LCD Monitor
- (2) Power LED
- (3) CF Card / Rec Status Light
- (4) Manual Record Button
- (5) Playback/ Pause Button
- (6) Close Status Row/ Close Monitor/ Open Monitor or Status Row
- (7) Stop Record or Playback/ Exit Menu
- (8&11) Volume Adjustment/ Cursor Movement Up or Down
- (9&13) Channel Adjustment/ Fast Playback/ Menu Value Setup Adjustment.
- (10) Enter Menu/ Enter Sub-Menu
- (12) Built-in Speaker